



# KTEB-2C72-1-TP-WS

## CIRCLINE ELECTRONIC BALLAST



### DESCRIPTION

2x FC16T9 + FC12T9 | 120V Input | Normal Power Factor | Rapid Start

<b>STARTING METHOD:</b> Rapid Start
<b>LAMP CONNECTION:</b> Series
<b>INPUT VOLTAGE:</b> 120Vac ±10%
<b>INPUT FREQUENCY:</b> 60 Hz
<b>POWER FACTOR:</b> Normal
<b>WARRANTY:</b> 3 Years




### PRODUCT FEATURES

- Sound Rated: A
- Minimum Case Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- UL Listed (Class P, Type 1 Outdoor)
- Remote Mounting: 18ft. max. Lead length
- Type HL

### ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Rated Lamp Watts	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD
FC16T9+FC12T9	1 + 1	40 + 32	120V	63W	0.93A	0.50	1.7	0.80	1.26	140%
FC12T9 + FC12T9	1 + 1	32 + 32	120V	54W	0.85A	0.50	1.7	0.80	1.48	145%
FC12T9+FC8T9	1 + 1	32 + 22	120V	47W	0.76A	0.50	1.7	0.81	1.72	155%
FC8T9+FC8T9	1 + 1	22 + 22	120V	40W	0.67A	0.50	1.7	0.81	2.03	170%

### WIRING DIAGRAM

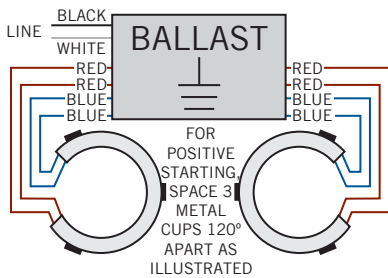

### HOT SPOT LOCATION






# KTEB-2C72-1-TP-WS

## CIRCLINE ELECTRONIC BALLAST

### PHYSICAL SPECIFICATIONS

#### CASE DIMENSIONS



<b>LENGTH</b>	6.00"
<b>WIDTH</b>	1.78"
<b>HEIGHT</b>	1.08"
<b>MOUNTING</b>	5.70"
<b>CASE STYLE</b>	L40

#### STANDARD LEAD LENGTHS\*

<b>BLACK</b>	14"
<b>WHITE</b>	14"
<b>BLUE</b>	9"
<b>RED</b>	9"

Lead wires are 18 AWG

**CASE MATERIAL:** Steel

\*Consult Keystone for special lead length requirements.

### ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-2C72-1-TP-WS-CP	Carton Pack	20	Quick Ship

### CATALOG NUMBER BREAKDOWN

# KTEB-2C72-1-TP-WS-CP

