


# FLUORESCENT LAMPHOLDERS MEDIUM BI-PIN G13 FOR T-8/T-12 LAMPS

FL011 Series



for shunted versions




D17



- White polycarbonate body, rated 110°C
- Turn lock, tall profile
- Quick connect push-in wire terminals for 18 AWG solid wire 5/16"
- For 0.23" - 0.040" (0.6 mm - 1.0 mm) panel thickness
- Two wire ports per terminal for easy harness wiring

- Available shunted for use with instant start electronic ballasts; saves time and makes wiring easier
- Rated 660W, 600V, suitable for all new HO lamps
- Many models to choose from
- cCSA<sub>US</sub> Certified / cUL<sub>US</sub> Listed
- Circle I s5487 Pending for shunted version(s)

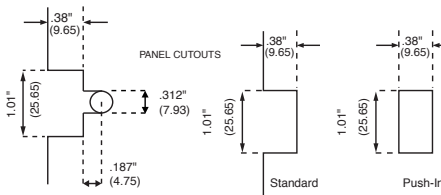

<p>Solid Shoulder Tall Profile</p> <p>FL011</p>	<p>Flexible Snap-In Shoulder</p> <p>FL011-W</p>
<p>Solid Shoulder Shunted</p> <p>FL011-S</p>	<p>Flexible Snap-In Shoulder Shunted</p> <p>FL011-WS</p>
<p>Solid Shoulder Captive Nut</p> <p>FL011-C</p>	<p>Flexible Snap-In Shoulder Captive Nut</p> <p>FL011-WC</p>
<p>Solid Shoulder Shunted, Captive Nut</p> <p>FL011-SC</p>	<p>Flexible Snap-In Shoulder Shunted, Captive Nut</p> <p>FL011-WSC</p>
<p>Solid Shoulder Disconnect</p> <p>FL011-D</p>	<p>Screws are packed separately. Also available assembled, add Suffix "-A" after part number.</p>

Linear Fluorescent