

Medium Bi-Pin Lampholders

For 400 and 800mA Lamps



534K™ Series Snap-In Lampholders

Specifications

Rating: 660 Watts, dual rated 600 V or 1000 V
Listing: UL File No. E-13408;
 UL Listed for outdoor use in enclosed signs and fixtures

Mounting: Snap-In

Materials


Housing: White urea
Contacts: Silver-plated phosphor bronze
Gasket: Blue silicone treated neoprene
Termination: Lead wires 9" (228.6 mm) long, 1 stranded and tinned lead wires, 1/2" stri standard. Wire rated: AWM 1000 V, 90°C (194°F).

534.1K™
Spring Loaded



The Blue "O" Ring is a registered trademark of Voltarc®

534.2K™
Stationary

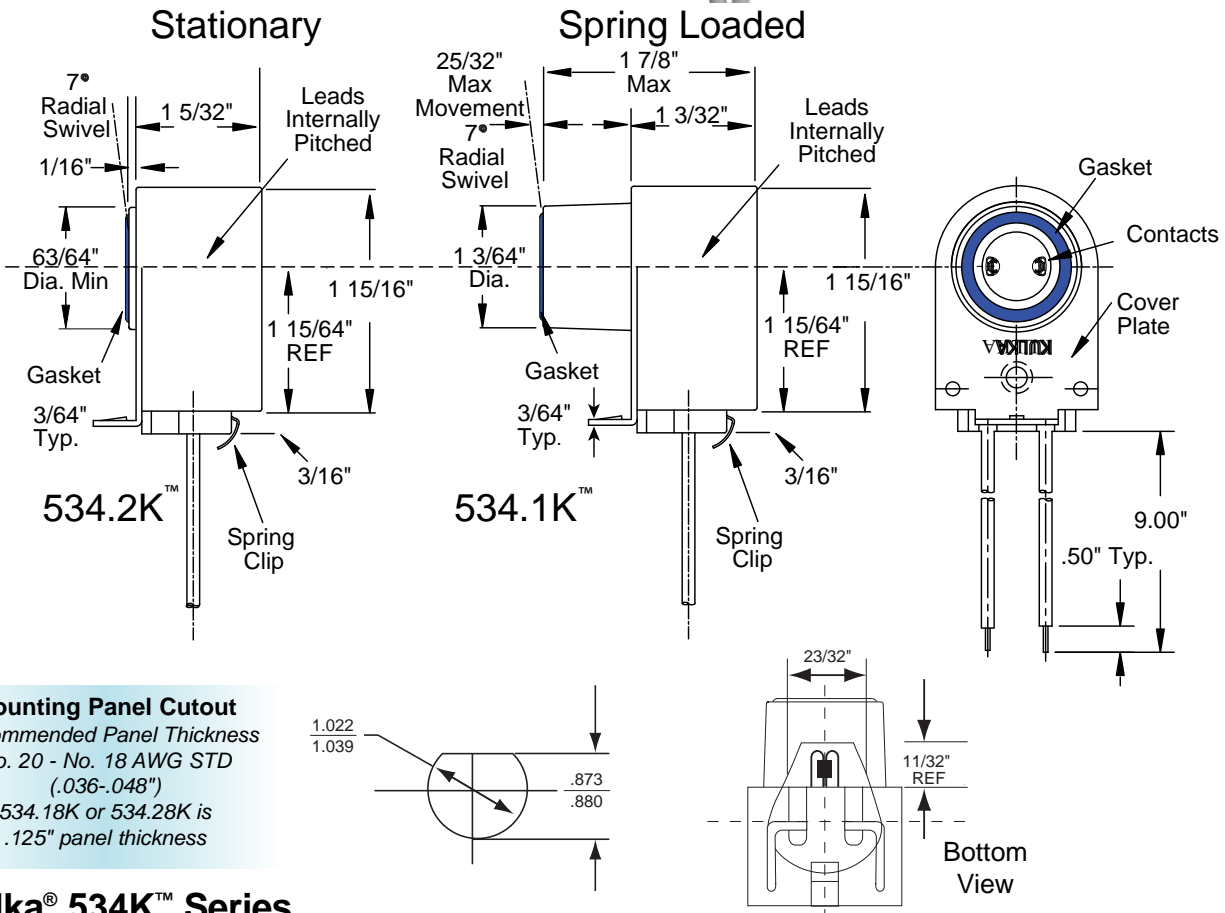

Mounting Panel Cutout
 Recommended Panel Thickness
 No. 20 - No. 18 AWG STD
 (.036-.048")
 534.18K or 534.28K is
 .125" panel thickness

Kulka® 534K™ Series

Spring Part No.	Stationary Part No.
-----------------	---------------------

534.1K	534.2K	Snap-in mounting, 9" long leadwires. Pitch and gasket are standard
534.18K	534.28K	Snap-in mounting, 9" long leadwires. .125" Panel thickness, pitch and gasket are standard

Packed 200/ box. **Special lead wire lengths available upon request, consult sales department.**