



G-23/GX-23 G24/GX24

COMPACT FLUORESCENT LAMPHOLDERS

LCM-G23-LP-SC Metal Lamp Support Screw Mount

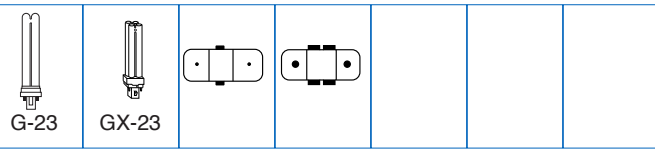




C5

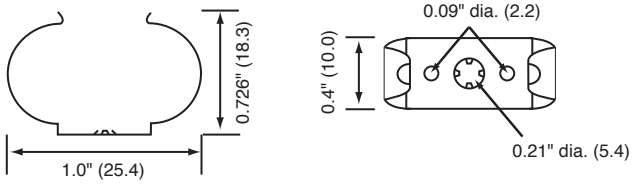

- Lamp support clip for G23 and GX23 base lamps
- Made from corrosion resistant spring steel for long service life
- Single height stand off of 0.160" (4.06mm)
- Screw mounts using one 0.210" (5.4mm) hole in panel
- Two smaller holes can be used to add anti rotation

CFG24-D Multi Wattage Non-Keyed Vertical 4 Hole Screw Mount



CF13G24-D1 13W G/GX24-D1 Base Keyed Version
CF18G24-D2 18W G/GX24-D2 Base Keyed Version
CF26G24-D3 26W G/GX24-D3 Base Keyed Version

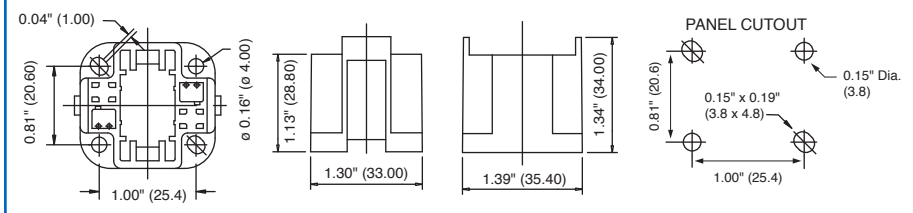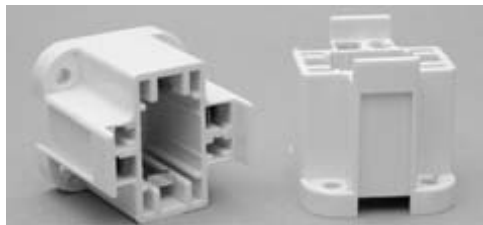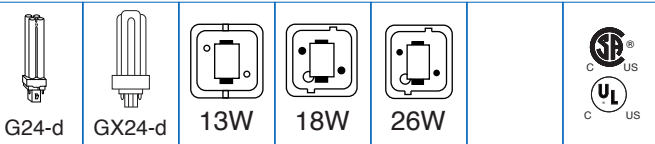

- For 2 pin quad lamps in G24 or GX24 base
- High strength polycarbonate body
- Metal spring clip for positive lamp retention
- Non-keyed accepts all lamp wattages, stock one item instead of three
- Quick connect push-in wire terminals for 18 AWG Solid or Twist & Tin, stripped 7/16"
- Each wiring port accepts 2 wires for easy harness wiring
- Four holes on base for secure mounting
- Rated 75W, 600V
- cCSA_{US} Certified / cUL_{US} Listed

CFG24-Q 13/18/26/32/42W Multi Wattage Non-Keyed

CF13G24-Q1 13W Keyed CF42G24-Q4 42W Keyed
CF18G24-Q2 18W Keyed CF57G24-Q5 57W Keyed
CF26G24-Q3 26W Keyed CF70G24-Q6 70W Keyed

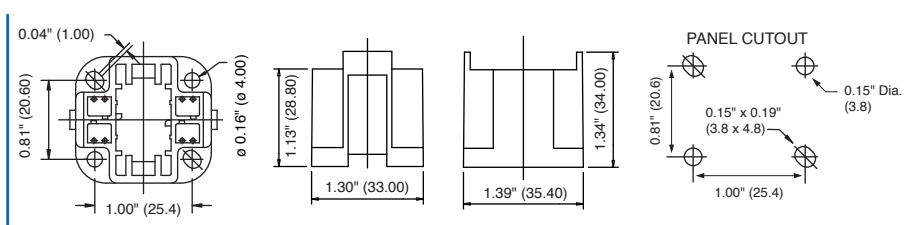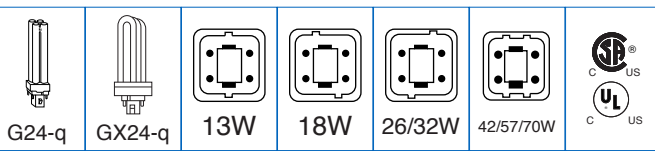

- For 4 pin quad lamps, electronically ballasted, in G24 or GX24 base
- High strength polycarbonate body
- Metal spring clip for positive lamp retention
- Non-keyed accepts all lamp wattages, stock one item instead of six
- Quick connect push-in wire terminals for 18 AWG Solid or Twist & Tin, stripped 7/16"
- Each wiring port accepts 2 wires for easy harness wiring
- Four holes on base for secure mounting
- Rated 75W, 600V
- cCSA_{US} Certified / cUL_{US} Listed

*Available in higher temperature material - 125C - Lexan 223R - ADD SUFFIX -223R to the part number

Compact Fluorescent